

Technical Proposal for JX-PD4-1G18G-16S Power Divider

- ◆ High Performance
- ◆ High Reliability

Revision History

Version	Date	Author	Revision description	Comment
V1.0	2019/04/09	Lin liqun	Created	/

JING XIN MICROWAVE TECHNOLOGY CO.,LTD

E-mail: sales@cdjx-mw.com Web: <http://www.cdjx-mw.com>

TEL: +86-28-85026087 FAX: +86-28-65026087 ext.8033 Zip Code:610045

Add: No.65,West 1st Wu Ke Road, Wu Hou District, Cheng Du City, Si Chuan Province, China.

Table of content

Technical Proposal for JX-PD4-1G18G-16S Power Divider.....	1
1. Mechanical layout.....	2
2. Electrical analysis.....	3

Figures

Figure 1 JX-PD4-1G18G-16S front panel layout.....	3
---	---

Tables

Table 1 Mechanical Specifications.....	2
Table 2 Electrical specifications.....	3

1. Mechanical layout

Table 1 Mechanical Specifications

Dimension	L x W x H: 99mm x 71mm x 10mm
Port connectors	SMA- Female
Finish	Gray paint
Notes	Material shall be RoHS 6/6

JING XIN MICROWAVE TECHNOLOGY CO.,LTD

E-mail: sales@cdjx-mw.com Web: <http://www.cdjx-mw.com>

TEL: +86-28-85026087 FAX: +86-28-65026087 ext.8033 Zip Code:610045

Add: No.65,West 1st Wu Ke Road, Wu Hou District, Cheng Du City, Si Chuan Province, China.

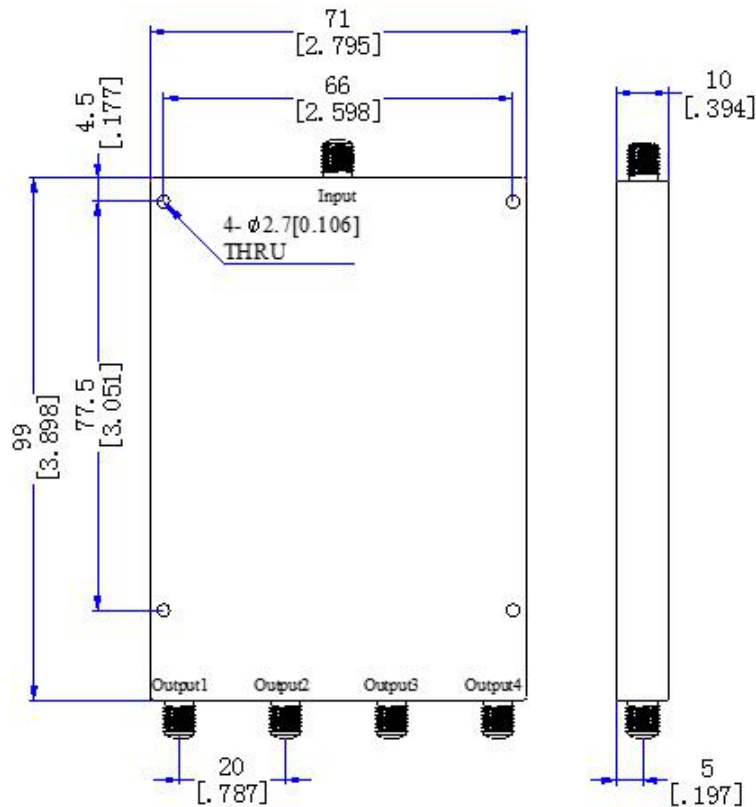


Figure 1 JX-PD4-1G18G-16S front panel layout

2. Electrical analysis

Table 2 Electrical specifications

Item	Parameter	Specification
1	Frequency range	1000-18000MHz
2	Insertion loss	≤3.0dB (Excluding theoretical loss 6.0 dB)
3	Input port VSWR	Typ.1.4 / Max.1.6
4	Output port VSWR	Typ.1.3 / Max.1.5
5	Isolation	Typ.18dB / Min.16dB
6	Amplitude balance	≤ 0.5dB
7	Phase balance	±6°
8	Forward power	20W
9	Reverse power	1W
10	Impedance	50Ω
11	Temperature range	-45°C to+85°C

JING XIN MICROWAVE TECHNOLOGY CO.,LTD

E-mail: sales@cdjx-mw.com Web: <http://www.cdjx-mw.com>

TEL: +86-28-85026087 FAX: +86-28-65026087 ext.8033 Zip Code:610045

Add: No.65,West 1st Wu Ke Road, Wu Hou District, Cheng Du City, Si Chuan Province, China.