

Professional manufacturer of
passive microwave components

DN: JX0067-18/12/2015 Rev:A
Technical Specifications



Power Divider: JX-PD-698/2700-2N/3N/4N

Specification:

Frequency Range	698~2700MHz		
Insertion Loss (dB)	≤0.4	≤0.6	≤0.6
Split Loss	3dB	4.8dB	6dB
VSWR	≤1.20 : 1	≤1.25 : 1	≤1.30 : 1
Isolation (dB)	≥20	≥20	≥18
Intermodulation	-130dBc with 2 carriers @2*43dBm		
Power Rating	50 W		
Interface	N-Female		
Operating Temperature	-25~+85℃		
Humidity	-0%~+100%		
Housing Finish Color	Gold/Gray/Frosted Matte Black		
Impedance	50Ω		
Applications	Indoor/Outdoor, IP65 ,RoHS Compliant		




成都旌信科技有限公司 JING XIN MICROWAVE TECHNOLOGY CO.,LTD

E-mail: cd-jingxin@139.com Sam.chen@cdjx-mw.com <http://www.cdjx-mw.com>

TEL: +86-28-85026087 FAX: +86-28-65941390

Add:成都市武侯区武青南路 33 号 武侯创业园 610045

NO.33 WuQing South Road, Wuhou District, ChengDu, China. Zip Code:610045

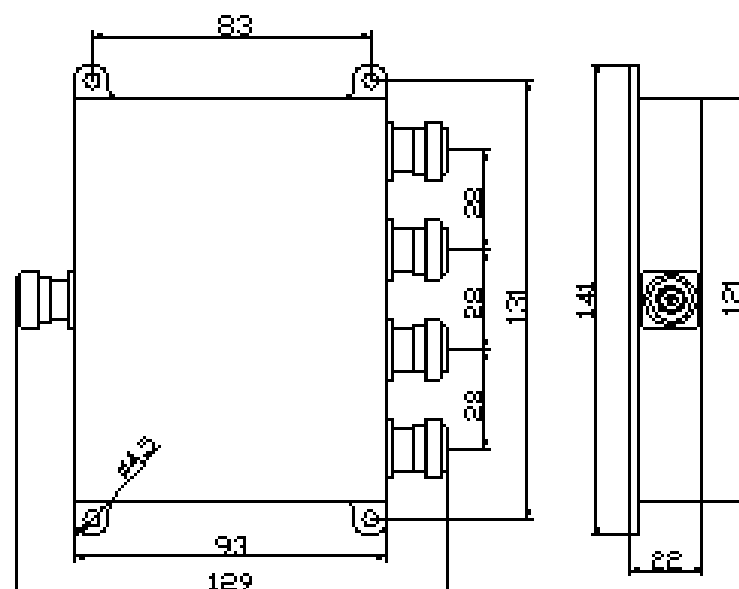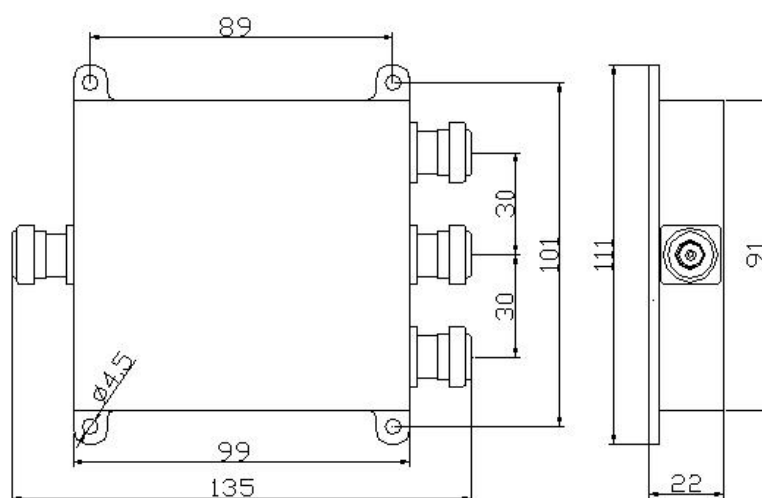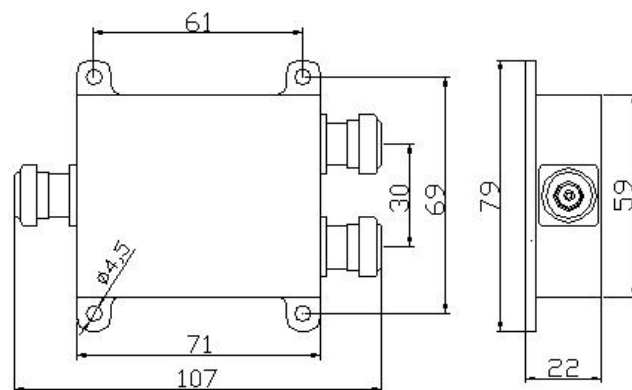

成都旌信科技有限公司 JING XIN MICROWAVE TECHNOLOGY CO.,LTD

E-mail: cd-jingxin@139.com Sam.chen@cdjx-mw.com <http://www.cdjx-mw.com>

TEL: +86-28-85026087 FAX: +86-28-65941390

Add:成都市武侯区武青南路 33 号 武侯创业园 610045

NO.33 WuQing South Road, Wuhou District, ChengDu, China. Zip Code:610045